

Halogen Sockets

Halogen Lamps	F2
Bi-Pin Halogen Lampholders	
G4/GZ4 Base	F3
GX5.3 (MR16) Base	F4-F5
G6.35, GX6.35 Base	F6
G4, GZ4, GX5.3, G6.35, GX6.35, G85, Multi-pin Base Lampholders	F7-F8
Ba15d – Double Contact Bayonet Lampholders	F9
E-11 – Minican Base Lampholder	F9
R7s – Double Ended Tungsten Halogen Lampholder	F10-F11
GU-7, GU-10 and GZ-10 (TAL) Lampholders	F12
Halogen Socket Accessories – protective glass, clips, terminal blocks	F13







Etlin-Daniels reserves the right to discontinue, modify designs and change specifications without incurring obligation. While every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error herein. Copyright © 2011 Etlin-Daniels

Halogen Lamps

ITEM NUMBER	VOLTAGE V	WATTAGE W	LUMENS LM	COLOUR K DEG	BASE	FIGURE	BEAM SPREAD	HOURS
JC12V10WT	12	10	120	2,850	G4	1	--	2,000
JC12V20WT	12	20	350	2,850	G4	1	--	2,000
JC12V50WT	12	50	950	3,000	G6.35	2	--	2,000
MR11C-20W-FTD	12	20	700	2,925	GZ-4	3	28 DEG	2,000
MR11C-35W-FTN	12	35	1,300	2,925	GZ-4	3	28 DEG	2,000
MR16C-50W-EXT	12	50	9,800	2,900	GX5.3	4	13 DEG	3,000
MR16C-50W-EXZ	12	50	3,200	2,900	GX5.3	4	26 DEG	3,000
MR16C-50W-EXN	12	50	1,600	2,900	GX5.3	4	32 DEG	3,000

MR11/MR16 Lamps available with or without cover.
Remove suffix "C" from part number for lamp without cover, eg: MR11-20-FTD.

ITEM NUMBER	VOLTAGE V	WATTAGE W	LUMENS LM	COLOUR K DEG	BASE	FIGURE	LENGTH MM	HOURS
J120-S-100W	120	100	1,600	2,900	R7s	5	78.3	1,500
J120-S-150W	120	150	2,600	2,900	R7s	5	78.3	1,500
J120-S-300W	120	300	5,400	2,900	R7s	5	78.3	2,000
J120-L-150W	120	150	2,250	2,900	R7s	6	117.6	2,000
J120-L-200W	120	200	3,400	2,900	R7s	6	117.6	2,000
J120-L-300W	120	300	5,400	2,900	R7s	6	117.6	2,000

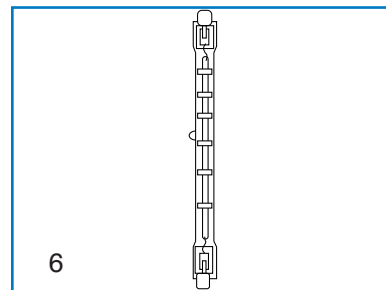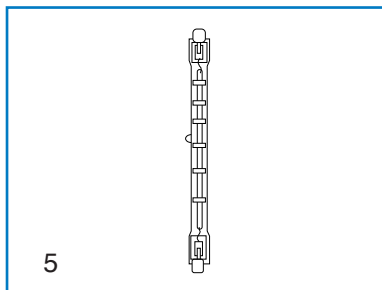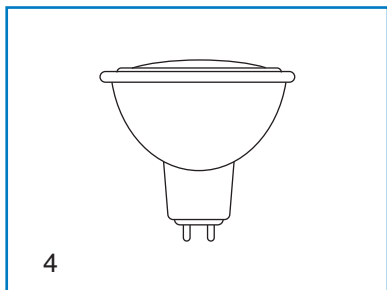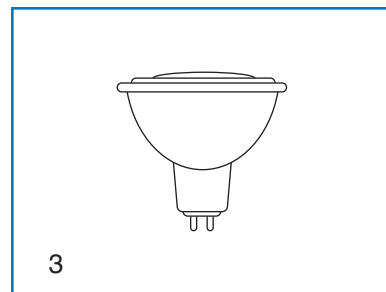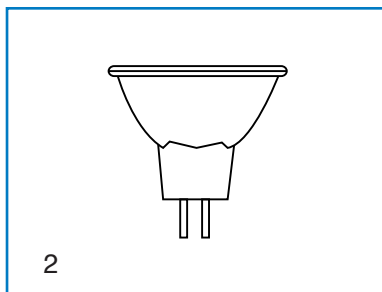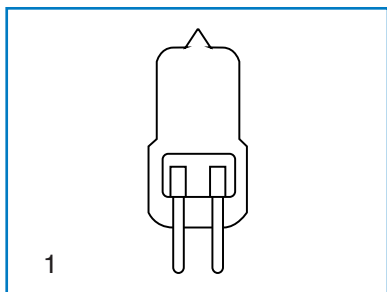


BI-PIN QUARTZ LAMPS

F3

Y01 G4 Base Lampholder Pipe Mount, Nylon
Y02 G4 Base Lampholder Pipe Mount, Steatite

		4mm Pin Spacing					
---	--	-----------------------	--	--	--	--	---

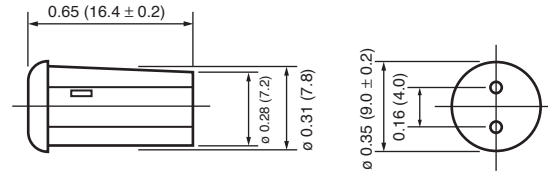




Y01 PPS High Heat Thermoplastic Body
Y02 Steatite Body



- Copper, nickel-plated double wipe contacts
- Available in PPS Thermoplastic or Steatite body

- Standard lead wires are Teflon high heat 200°C, 12" long, stripped 1/2"
- Friction mounts inside pipe diameter
- Can be used to design visually interesting points in chandeliers, downlights and display lighting
- Rated 6A 24V

- UL Listed
- CSA Certified

Y71 G4 Base Lampholder With Mounting Ears

		4mm Pin Spacing					
---	--	-----------------------	--	--	--	--	---

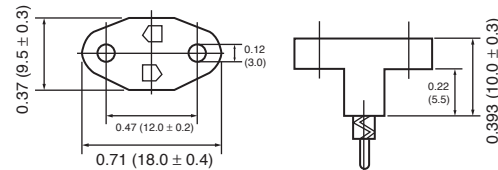
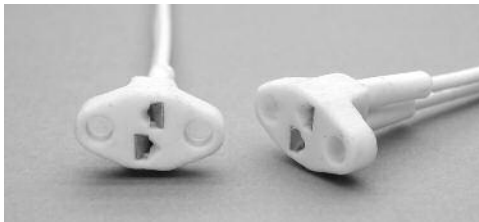



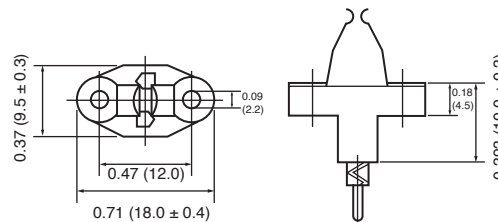
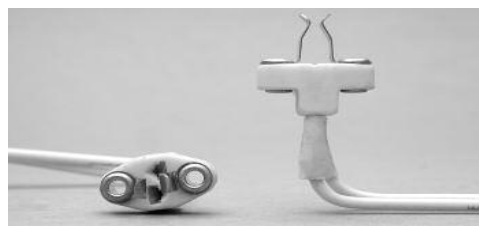
- Steatite body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"

- Mounts using 2 screws through mounting ears
- Leads can be customized to any length in silicon rubber, SEW or Teflon wire

- Rated 6A 24V
- UL Listed
- CSA Certified

Y73 G4 Base Lampholder With Mounting Ears & Metal Lamp Support Clips

		4mm Pin Spacing					
---	--	-----------------------	--	--	--	--	---



- Steatite body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are Teflon high heat 200°C, 12" long, stripped 1/2"




- Mounts using 2 screws through mounting ears
- Has 2 metal lamp support clips for positive lamp retention

- Leads can be customized to any length in silicon rubber, SEW or Teflon wire
- Rated 6A 24V
- UL Listed
- CSA Certified

Halogen

F4

B34 GX5.3 Base Lampholder Screw Mount

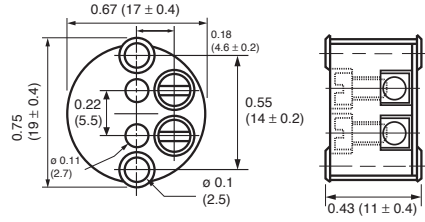
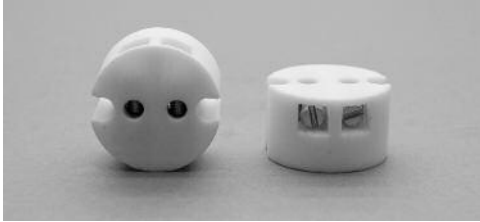
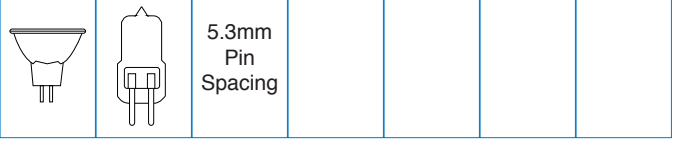


- Round Steatite body
- Has screw terminals which allows assembly after wires have been routed through fixture

- Lamps are held in place using screws on lamp pins for most secure lamp retention

- Mounts using 2 holes through socket
- Rated 8A 24V

IS126R (F53) GX5.3 Base Floating Lampholder With Reflector


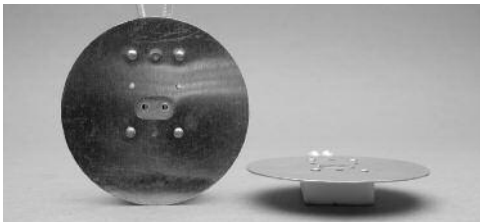
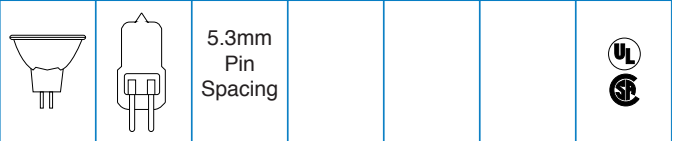


- Rectangular porcelain body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are Teflon high heat 200°C, 12" long, stripped 1/2"

- Wire exit on side of the socket
- Floating socket design attaches to fixed position lamp
- Other wire and terminations are available upon request, contact the factory

- Aluminum reflector to push heat and light forward
- Rated 8A 24V
- UL Listed
- CSA Certified

F55 GX5.3 Base Lampholder With 1/8" IPS Hickey

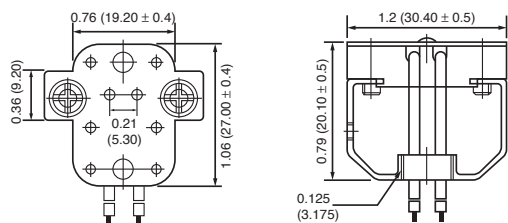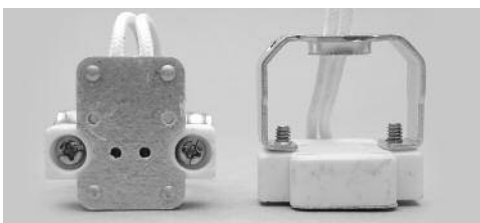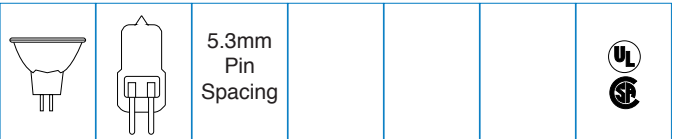

- Rectangular Steatite body with ears
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs

- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Has 1/8" IPS threaded hickey to secure to pipe threads, which allows for greater design flexibility


- Rated 8A 24V
- UL Listed
- CSA Certified

Halogen



BI-PIN QUARTZ LAMPS

F5

F59 GX5.3 Base Lampholder, 2 Hole
Screw Mount

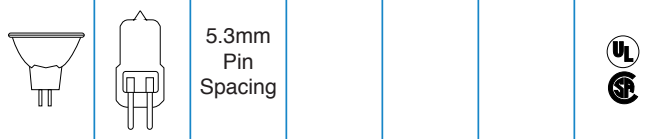

5.3mm
Pin
Spacing

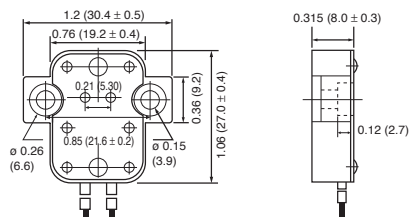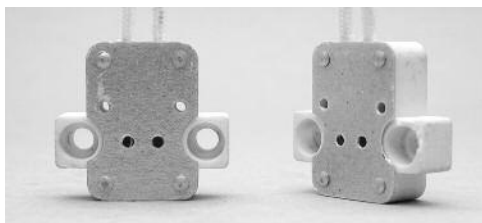


- Rectangular Steatite body with mounting ears
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs



- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped ½"
- Has 2 mounting ears with 0.150 (3.9 mm) holes to secure socket

- Other wire and terminations are available upon request, contact the factory
- Rated 8A 24V
- UL Listed
- CSA Certified

H81H GX5.3 Base Lampholder Offset
Screw Mount

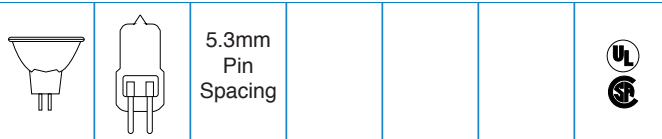

5.3mm
Pin
Spacing

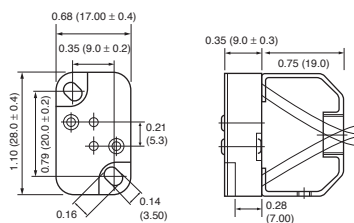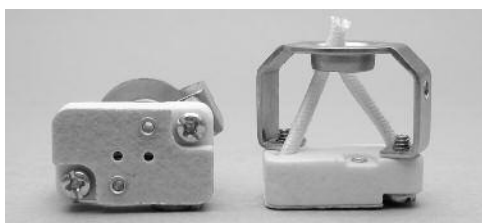

- Rectangular Steatite body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs



- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped ½"
- Wires exit through the back of socket
- Other wire and terminations are available upon request, contact the factory

- Has ¼" IPS threaded hickey to secure to threaded pipe, for greater design flexibility
- Rated 8A 24V
- UL Listed
- CSA Certified

IS126 (F58) GX5.3 Base Rectangular
Floating Lampholder



5.3mm
Pin
Spacing

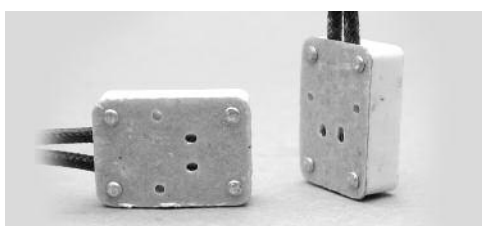

- Rectangular porcelain body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs



- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped ½"
- Wire exit on side of the socket
- Floating socket design attaches to fixed position lamp

- Other wire and terminations are available upon request, contact the factory
- Rated 8A 24V
- UL Listed
- CSA Certified



Halogen

F6

IS128-12SEW (H81) GX5.3 Base Offset Screw Mount Lampholder



5.3mm
Pin
Spacing

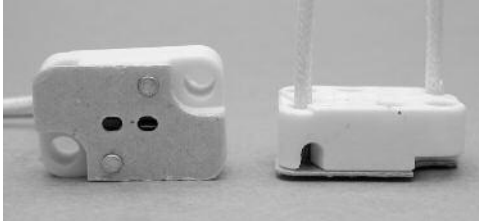



- Rectangular porcelain body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs

- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped ½"
- Offset holes on 2 corners of socket for fast and easy mounting



- Wire exit from back of socket
- Rated 8A 24V
- UL Listed
- CSA Certified

Halogen

C62 GX6.35 Base Lampholder With Threaded Bushings



6.35mm
Pin
Spacing

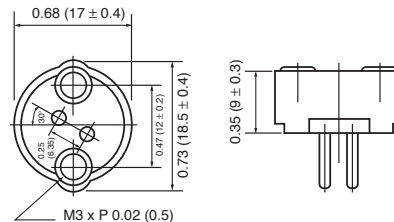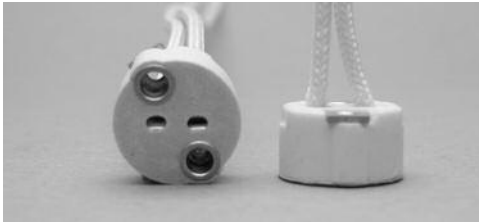


- Round Steatite body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs



- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped ½"
- Mounts using M3 screws into threaded bushings in socket

- Other wire types, lengths and terminations are available upon request, contact the factory
- Rated 8A 24V
- UL Listed
- CSA Certified

HLDH01-G12 G12 Base Metal Halide Lampholder Screw Mount



G-12

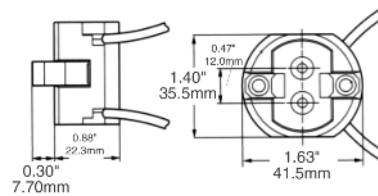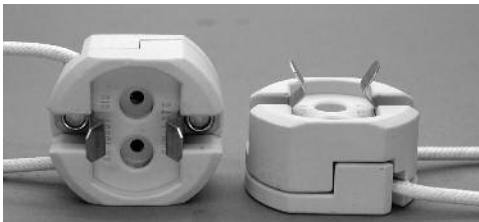

- Hi heat steatite body
- For single ended G12 Metal halide lamps
- Ideal for display lighting, gallery, showcase applications
- Wires exit from side of socket




- User notes: Keep the leads as short as possible. Use additional sleeving to leads to increase dielectric, abrasion and UV protection.

- Metal clips for increased lamp retention
- Rated 1000W - 600V
- 5KV pulse rated
- cUR_{US} listed

MULTI-BASE BI-PIN QUARTZ LAMPS

F7

C32 Multi G4/GZ4/GX5.3/G6.35/GX6.35 Base Round Lampholder, Screw Mount

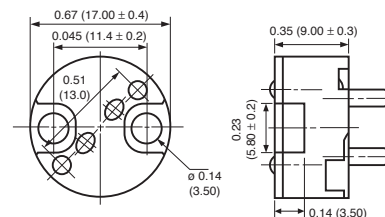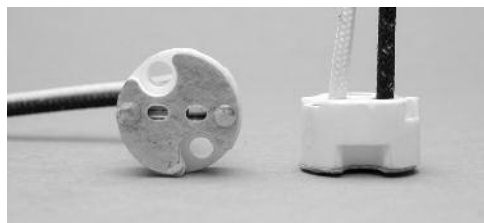
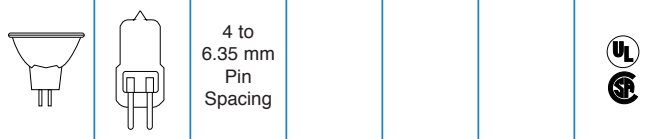


- Round Steatite body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"

- Multi-pin base provides maximum flexibility and reduces inventory costs
- Mounts using 2 screws in recessed nests through socket body

- Other wire types, lengths and terminations are available upon request, contact the factory
- Rated 8A 24V
- UL Listed
- CSA Certified

C36 Multi G4/GZ4/GX5.3/G6.35/GX6.35 Base Round Lampholder With 1/8" IPS Hickey

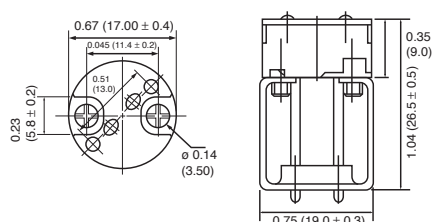
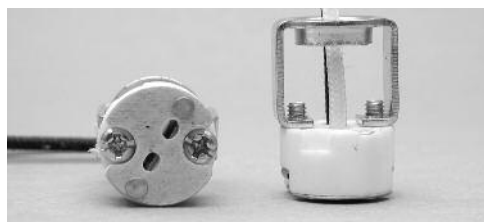


- Round Steatite body
- Double wipe contacts
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Multi-pin base provides maximum flexibility and reduces inventory costs

- Mounts on 1/8" IPS pipe through attached hickey
- Brackets can be grounded upon request
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 8A 24V
- UL Listed
- CSA Certified

C60 Multi G4/GZ4/GX5.3/G6.35/GX6.35 Base Round Lampholder With 90° Angled Bracket

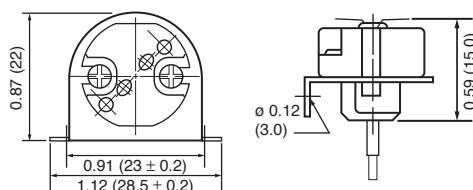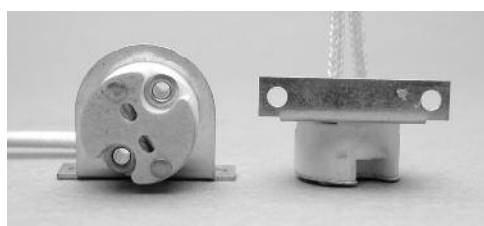

- Round Steatite body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"

- Multi-pin base provides maximum flexibility and reduces inventory costs
- Mounts using two M3 screws in base of mounting plate
- Other wire types, lengths and terminations are available upon request, contact the factory



- Rated 8A 24V
- UL Listed
- CSA Certified

Halogen



MULTI-BASE BI-PIN QUARTZ LAMPS

F8

C82 Multi G4/GZ4/GX5.3/G6.35/GX6.35 Base Round Lampholder With Threaded Bushings



4 to 6.35 mm Pin Spacing

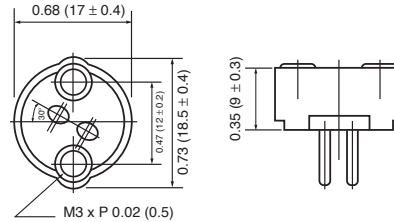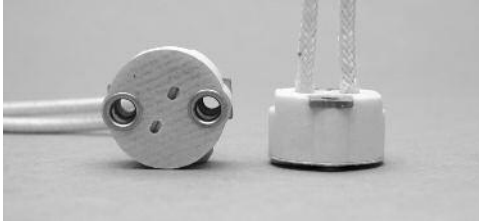



- Round Steatite body
- Double wipe contacts
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG

- SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Multi-pin base provides maximum flexibility and reduces inventory costs
- Mounts using two M3 screws in base of mounting plate
- Other wire types, lengths and



- terminations are available upon request, contact the factory
- Rated 8A 24V
- UL Listed
- CSA Certified

Halogen

Y33 Multi G4/GZ4/GX5.3/G6.35/GX6.35 Base Lampholder With Mounting Ears



4 to 6.35 mm Pin Spacing

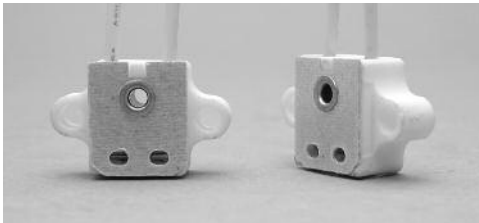



- Square Steatite body with mounting ears
- Double wipe contacts
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Multi-pin base provides maximum flexibility and reduces inventory costs

- Mounts using two M3.5 screws through mounting ears on socket
- Other wire types, lengths and terminations are available upon request, contact the factory

- Can be harnessed together for linear accent lights
- Rated 8A 24V
- UL Listed
- CSA Certified

G8.5 Base Lampholder Push in Terminal Screw Mount

8.5 mm Pin Spacing

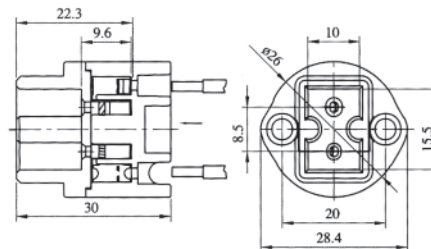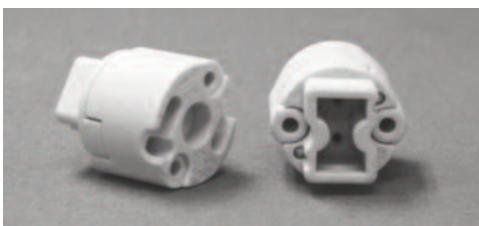

- Push in wire terminal
- For G base G8.5 bi pin
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 2A at 1000V
- cUR_{US} Listed

Ba15d BASE & E11 MINICAN BASE LAMPS



L11 Ba15d Base Bayonet Lampholder With 1/8" IPS Male Nipple for Mounting



Ba15d



F9

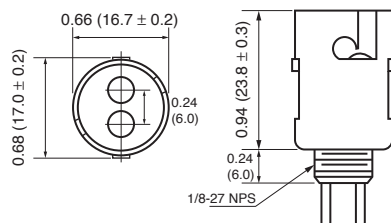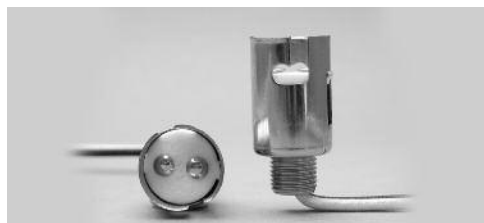

- Nickel plated metal shell conforms to UL requirement for stabilizing bulb against coaxial displacement
- Steatite contact base
- All shells are grounded independent of contacts

- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Mounts using 1/8" IPS – 27 NPS threaded nipple
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 8A 24V
- UL Listed
- CSA Certified


L13 Ba15d Base Bayonet Lampholder With Snap-In Clip Mount



Ba15d



Halogen

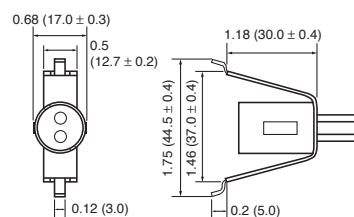


- Nickel plated metal shell conforms to UL requirement for stabilizing bulb against coaxial displacement
- Steatite contact base
- All shells are grounded independent of contacts


- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Snap-in mounts into panel for easy installation
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 8A 24V
- UL Listed
- CSA Certified

T11 E11 Minican Lampholder With Mounting Ears



E11

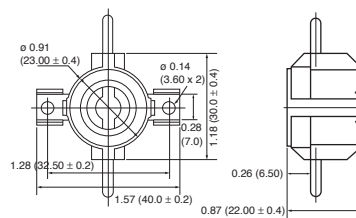

- Steatite body
- Nickel-plated brass screw shell
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"




- Mounts using 2 screws through 3.6 mm hole on mounting ears
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 4A 250V 1,000W
- UL Listed
- CSA Certified

DOUBLE ENDED R7s LINE VOLTAGE LAMPS

F10

K12 Single Heavy Duty R7s Lampholder

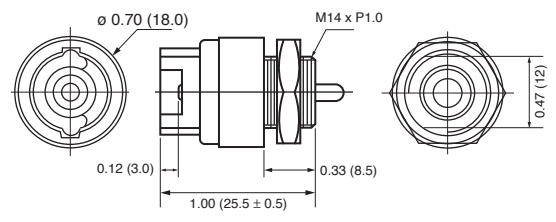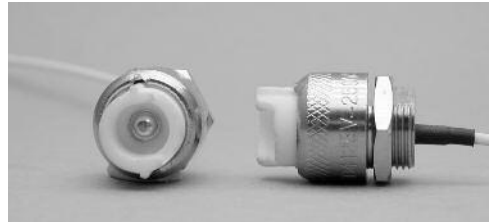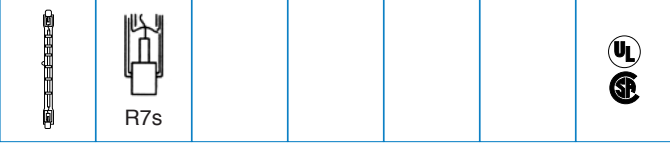



- Heavy Duty construction
- Outer shell is die cast, housing is Steatite
- Contacts are silver-plated with inner coil spring for maintained contact pressure

- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Mounts into double "D" hole, 14 mm x 12 mm on flats
- Two sockets are required per lamp
- Other wire types, lengths and

- terminations are available upon request, contact the factory
- Rated 2A 200V
- UL Listed
- CSA Certified

Halogen

K13 Heavy Duty R7s Lampholder With Assembled Bracket For T4 79 mm Lamps

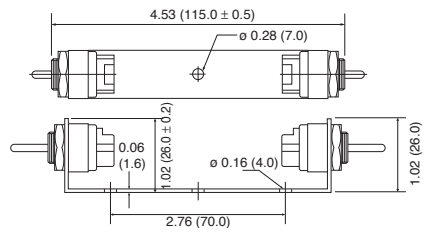
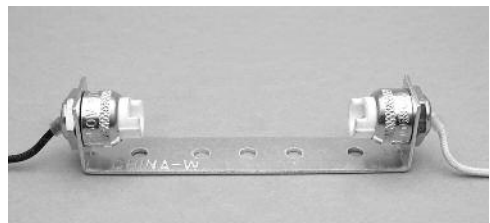


- Heavy Duty construction
- Outer shell is die cast, housing is Steatite
- Contacts are silver-plated with inner coil spring for maintained contact pressure

- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Two pieces of K12 mounted on short bracket for faster assembly
- Mounts using holes on heavy gauge steel bracket

- Other wire types, lengths and terminations are available upon request, contact the factory
- Rated 10A 200V
- UL Listed
- CSA Certified

K14 Heavy Duty R7s Lampholder With Assembled Bracket For T3 119 mm Lamps

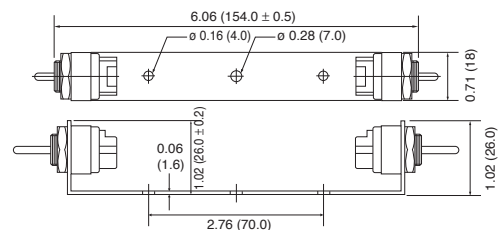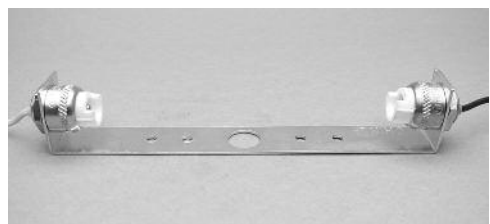

- Heavy Duty construction
- Outer shell is die cast, housing is Steatite
- Contacts are silver-plated with inner coil spring for maintained contact pressure

- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Two pieces of K12 mounted on long bracket for faster assembly
- Mounts using holes on heavy gauge steel bracket

- Other wire types, lengths and terminations are available upon request, contact the factory
- Rated 10A 200V
- UL Listed
- CSA Certified



DOUBLE ENDED R7s LINE VOLTAGE LAMPS

F11

K21 Single R7s Lampholder



R7s

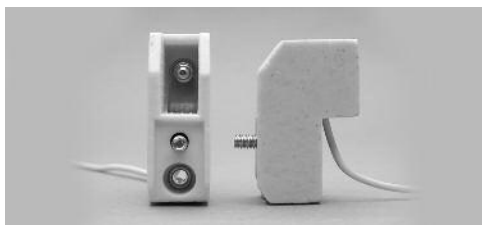

- Steatite porcelain body
- Silver-plated contact with stainless steel backup spring to hold lamp securely in place
- Two are required per lamp


- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"
- Mounts using 1-5/32" x 3/8" captive screw
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 8A 250V
- UL Listed
- CSA Certified

K23 R7s Lampholder With Assembled Bracket For T4 79 mm Lamps



R7s

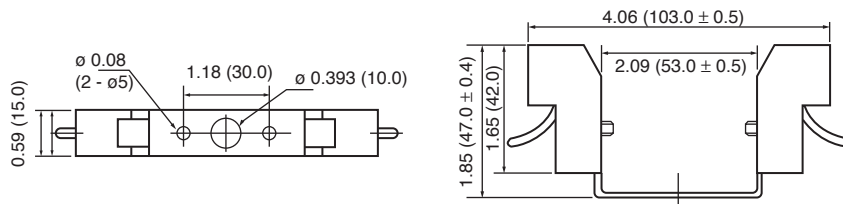

- Steatite porcelain body
- Silver-plated contacts with stainless steel backup spring to hold lamp securely in place
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"


- Two pieces of K21 are mounted on short, heavy gauge steel bracket for faster assembly
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 8A 250V
- UL Listed
- CSA Certified

K24 R7s Lampholder With Assembled Bracket For T3 119 mm Lamp



R7s

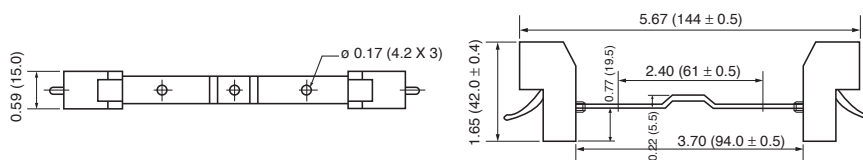

- Steatite porcelain body
- Silver-plated contacts with stainless steel backup spring to hold lamp securely in place
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/2"

- Two pieces of K21 are mounted on long, heavy gauge steel bracket for faster assembly
- Other wire types, lengths and terminations are available upon request, contact the factory

- Rated 8A 250V
- UL Listed
- CSA Certified

Halogen


GU-7, GU-10 & GZ-10 BASE LAMPS

F12

DF-01 GU-10 Base (TAL) Lampholder



GU-10



- High heat Steatite body
- Brass contacts
- Two hole mounting through lampholder body into panel

- Comes with standard 12" SEW-1 200°C leads
- Other wire types, lengths and terminations are available upon request, contact the factory

- Available with 1/8" IPS hickey, add suffix "H" to part number
- Rated 100W at 250V
- cUR_{us} Listed
- VDE Approved, 2A 250V

Halogen



DF-05 GU-10/GZ-10 Base (TAL) Lampholder



GU-10



GZ-10

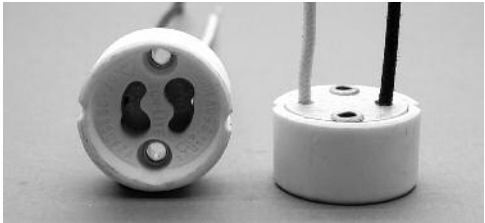

- High heat Steatite body
- Brass contacts
- Two hole mounting through lampholder body into panel

- Comes with standard 12" SEW-1 200°C leads
- Other wire types, lengths and terminations are available upon request, contact the factory

- Available with 1/8" IPS hickey, add suffix "H" to part number
- Rated 100W at 250V
- VDE Approved, 2A 250V
- cUR_{us} Listed

HALOGEN LAMPHOLDER ACCESSORIES

F13


E27 GU-10 Adapter



GU-10



- High heat Steatite body
- Nickel-plated copper screw shell
- Allows conversion of GU-10 TAL lamps to medium base for line voltage applications

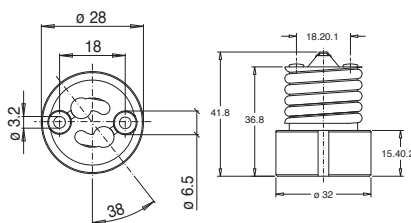


- Lamp simply twists into the adapter, which easily screws into medium base lampholder
- Useful in converting existing recessed cans to line voltage halogen (new trims must be installed)
- Design patent pending
- cUL_{US} Approved

PG3090 90 mm Protective Glass PG30135 135 mm Protective Glass





- For use with K13-K14 and K23-K24 series lampholders
- PG3090: 30 mm W x 88 mm L x 2 mm T; used with K13-K23
- PG30135: 30 mm W x 135 mm L x 2 mm T; used with K14-K24
- High heat tempered silicon glass

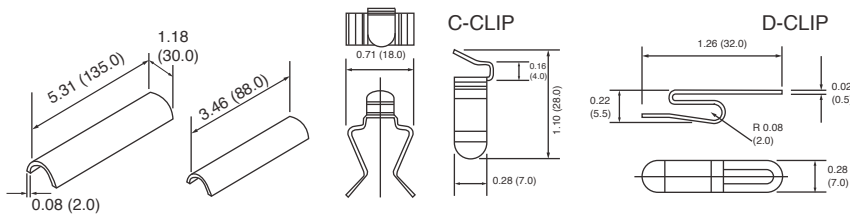

- Use to protect from flying, shattered glass particles in the event of a severe lamp failure
- Use either a pair of "C" clips for snap-on mount to socket or "D" clips for screw mount onto an aluminum reflector

K41 2 Pole Porcelain Terminal Block K42 3 Pole Porcelain Terminal Block

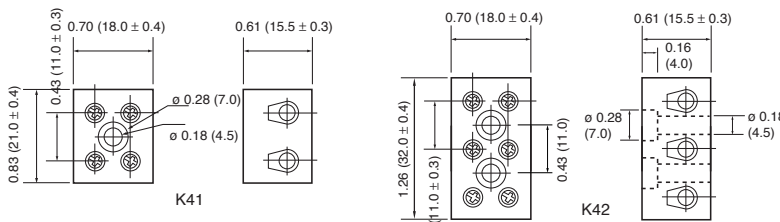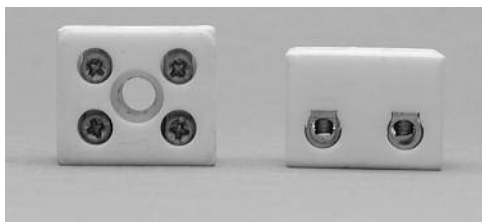

- Unglazed high heat Steatite body
- Nickel-plated brass terminals
- M3 slotted terminal screws
- Mount using #8-32 screws
- 20-14 AWG wire range

Halogen